

SWMS No 015	SJD Electrical Job Safety Analysis / Safe Work Method Statement	Page 1 of 9
-------------	---	-------------

SJD ELECTRICAL PTY LTD - ABN 53 127 802 608 - ACN 127 802 608 - ELECTRICAL LICENCE 68608 - QBCC LICENCE 1270514 - ARC LICENCE AU19801 - MOLEX LICENCE CIAU3372
--

Safe Work Method Statement Title: SWMS: 015 SCISSOR LIFT / BOOM LIFT / CHERRY PICKER	Date Created: 00/00/16
---	-------------------------------

Project Name:	Person responsible for ensuring compliance with this SWMS:	Review Date: 00/00/17
----------------------	---	------------------------------

Project/Client:	Job No:	Authorised By:	Revision No. 0
------------------------	----------------	-----------------------	-----------------------


Licences, Permits, Competencies Required: (tick items relevant to this task and site)				
--	--	--	--	--

<input type="checkbox"/> Confined Space	<input type="checkbox"/> Work at Heights	<input type="checkbox"/> Excavation	<input type="checkbox"/> Hot Work	<input type="checkbox"/> Radiation
<input type="checkbox"/> White Card	<input type="checkbox"/> EWP	<input type="checkbox"/> Electrical License	<input type="checkbox"/> Rescue and Resuscitation	<input type="checkbox"/> Network Access

Common Hazards to Manage: (tick items relevant to this task and site)				
--	--	--	--	--

<input type="checkbox"/> Manual handling	<input type="checkbox"/> Working at Heights	<input type="checkbox"/> Risk of Electric Shock	<input type="checkbox"/> Slips, Trips and Falls	<input type="checkbox"/> Housekeeping
--	---	---	---	---------------------------------------

HAZARD CLASSIFICATION MATRIX POSSIBLE RESULTS Risk = Consequence x Likelihood			Probability				
			RARE A	UNLIKELY B	POSSIBLE C	LIKELY D	ALMOST CERTAIN E
Consequences	Catastrophic	5	Medium (M)	High (H)	High (H)	Extreme (E)	Extreme (E)
	Major	4	Medium (M)	Medium (M)	High (H)	High (H)	Extreme (E)
	Moderate	3	Low (L)	Medium (M)	High (H)	High (H)	High (H)
	Minor	2	Low (L)	Low (L)	Medium (M)	Medium (M)	High (H)
	Insignificant	1	Low (L)	Low (L)	Low (L)	Medium (M)	Medium (M)

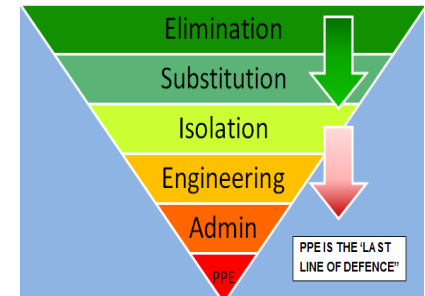

RISK RATING	ACTION REQUIRED (ALARP – As Low As Reasonably Practicable)
E = Extreme, UNACCEPTABLE	Intolerable risk. Activity must not be undertaken prior to Management / CEO review of potential risk mitigation measures and a decision that risk is ALARP
H = High risk, Only acceptable if ALARP	Implement strict control measures to reduce risk to an acceptable level. Activity must not continue until the level of risk is reduced to As Low As Reasonably Practicable (ALARP) and preferably Medium rating. Operations Manager and/or Project Supervisor approval of the risk controls is required.
M = Medium risk Undesirable	Specify, document and implement existing risk controls and additional management actions to reduce the risk to ALARP and <u>preferably Low rating</u> . Activity must not continue without Operations Manager and/or Project Supervisor approval.
L = Low risk, Tolerable	Tolerable risk. Carry out activity

Basic
PPE to
be used



✓ app												
Other PPE:												

SWMS No 015	<div>SJD Electrical</div> <div>Job Safety Analysis / Safe Work Method Statement</div>	Page 2 of 8
Safe Work Method Statement Title: SWMS: 015 SCISSOR LIFT / BOOM LIFT / CHERRY PICKER		

Job Task #	Job Step	Potential Health, Safety and Environmental Hazards	PROBABILITY	CONSEQUENCE	RATING	Control Measures	PROBABILITY	CONSEQUENCE	RATING	PERSON(S) RESPONSIBLE
1	Planning and preparation	Non-compliance with current legislative requirements and company processes.	D	4	H	<p>All personnel to complete site specific induction.</p> <p>All personnel to have completed company specific induction.</p> <p>Personnel are to hold the required licenses and certificates for the work, and be assessed as competent to use or operate equipment and plant.</p> <p>All personnel must read, understand and sign off on this SWMS. All personnel are given the opportunity to provide input into the content of this SWMS.</p> <p>Daily pre-starts will be held at the beginning of each shift.</p> <p>Any changes throughout the shift will be communicated prior to the commencement of the next task.</p> <p>A JSA is to be completed for any changes to the task.</p> <p>Ensure permit requirements are understood.</p>	B	4	M	<p>Work crew</p> <p>Supervisor</p> <p>Permit Holder</p>
		<p>Working outdoors with exposure to;</p> <ul style="list-style-type: none"> UV / high temperatures causing heat stress / dehydration / sunburn Fauna and insects causing bites and stings 	D	3	H	<p>'Check ins' during extreme weather conditions.</p> <p>Comply with the Queensland Worksafe heat stress procedure.</p> <p>Ensure there is an area in the shade for rest (preferably Crib Facilities).</p> <p>Work Breaks are compulsory at nominated times (preferably during the hotter parts of the day)</p> <p>Drink adequate water amount of water.</p> <p>Use sun block for protection from sun.</p> <p>Use insect repellent (if applicable).</p>	B	3	M	Work crew
		<p>Interactions with other trades working in the vicinity;</p> <ul style="list-style-type: none"> Inadvertently cause hazardous situation including trips, slips, falls 	D	3	M	<p>Ensure other workers are informed and aware of all other trades working in the area</p> <p>Communicate potential interactions during prestart</p>	b	3	I	<p>Supervisor</p> <p>Work Crew</p>

Job Task #	Job Step	Potential Health, Safety and Environmental Hazards	PROBABILITY	CONSEQUENCE	RATING	Control Measures	PROBABILITY	CONSEQUENCE	RATING	PERSON(S) RESPONSIBLE
		Unauthorized access to work area by other authorized personnel without correct PPE.	D	3	H	<p>Follow all site rules and procedures.</p> <p>Wear all mandatory PPE and task specific PPE.</p> <p>If a hazard is identified in the work area – fix it immediately or if unable to do so, isolate the hazard and inform your supervisor immediately.</p> <p>Site wide barricading to be installed to restrict access to unauthorized personnel.</p> <p>Signage to be visible around all site and at all access points.</p> <p>All visitors must report to site office before entering site.</p> <p>All visitors to be escorted by a site inducted personnel member.</p>	B	3	M	Supervisor Work crew
		<p>Poor ground conditions</p> <p>Uneven, loose, wet or soft ground at the work site.</p>	C	2	M	<p>Inspect path of travel for any obstructions and remove them.</p> <p>Daily site inspections prior to commencement of work activities and at the conclusion of each work day.</p> <p>Regular housekeeping inspections including regular walk rounds to be conducted to ensure a clean and tidy work area.</p>	B	2	L	Work crew
2	Work area preparation	<p>Personal injury -</p> <ul style="list-style-type: none"> - Cuts, strains, abrasions, burns - Possible eye injury - Dust inhalation (depends on surrounds – these tasks should not cause dust or fumes) 	C	3	H	<p>Authority and empowerment to Stop the Job.</p> <p>Follow all site rules and procedures.</p> <p>Ensure correct manual handling techniques are followed.</p> <p>Wear all mandatory PPE and task specific PPE.</p> <p>Communicate task clearly with all work crew members. Ensure a thorough understanding of expectations.</p> <p>If a hazard is identified in the work area – fix it immediately or if unable to do so, isolate the hazard and inform you supervisor.</p> <p>Work on flat surface where practicable</p> <p>Secure all tools and/or equipment by lanyard or store in a toolbox/basket when on the work platform.</p>	B	3	M	Work crew Supervisor

Job Task #	Job Step	Potential Health, Safety and Environmental Hazards	PROBABILITY	CONSEQUENCE	RATING	Control Measures	PROBABILITY	CONSEQUENCE	RATING	PERSON(S) RESPONSIBLE
3	Operating Elevated Work Platform	Fall from height	D	4	H	<p>Safety harness to be worn at all times while in EWP (remove if not applicable).</p> <p>Barricade / secure work area to prevent unauthorised access.</p> <p>Carefully inspect your ladder to ensure there are no worn parts or damage before climbing:</p> <ul style="list-style-type: none"> - Joints between steps and side rails are tight, all fittings are secure, moving parts operate freely. - Rungs and platform are free of paint splatter, grit, oil and grease, welds are intact - All components of ladder intact including side rails, rungs, platform, feet, hand grip <p>If any component is found to be worn or damaged, RECTIFY ANY FAULTS BEFORE USE.</p>	B	4	M	Work crew
		Unqualified /inexperienced operator	D	3	H	<p>Ensure operator has correct competencies to operate EWP.</p> <p>Ensure operator is confident in performing the task.</p>	B	3	M	Supervisor Work Crew
		Machine tip over / collision	D	2	M	<p>Ensure a prestart / inspection is conducted on the EWP prior to use.</p> <p>Do not overload platform – ensure SWL is not exceeded (as per manufacturer’s instructions.</p> <p>Do not use EWP to push / pull objects.</p> <p>No unauthorised access within operating exclusion zone.</p> <p>Do not stand or sit on kick boards or handrails.</p>	B	2	L	Supervisor Work crew

Job Task #	Job Step	Potential Health, Safety and Environmental Hazards	PROBABILITY	CONSEQUENCE	RATING	Control Measures	PROBABILITY	CONSEQUENCE	RATING	PERSON(S) RESPONSIBLE
		EWP failure causing injury to worker - Crush / struck by object - Cuts, strains, abrasions, burns	C	3	H	Authority and empowerment to Stop the Job . Ensure positive communication at all times with the operator. Follow all site rules and procedures. Ensure correct manual handling techniques are followed. Wear all mandatory PPE and task specific PPE. Communicate task clearly with all work crew members. Ensure a thorough understanding of expectations. If a hazard is identified in the work area – fix it immediately or if unable to do so, isolate the hazard and inform you supervisor. Work on flat surface where practicable	B	3	M	Work crew Supervisor
4	Working on Elevated Work Platform	Fall from height	D	4	H	Safety harness to be worn at all times while in EWP (remove if not applicable). Barricade / secure work area to prevent unauthorised access. Carefully inspect your ladder to ensure there are no worn parts or damage before climbing: <ul style="list-style-type: none"> - Joints between steps and side rails are tight, all fittings are secure, moving parts operate freely. - Rungs and platform are free of paint splatter, grit, oil and grease, welds are intact - All components of ladder intact including side rails, rungs, platform, feet, hand grip If any component is found to be worn or damaged, RECTIFY ANY FAULTS BEFORE USE .	B	4	M	Work crew
		Machine tip over / collision	D	2	M	Ensure a prestart / inspection is conducted on the EWP prior to use. Do not overload platform – ensure SWL is not exceeded (as per manufacturer's instructions). Do not use EWP to push / pull objects. No unauthorised access within operating exclusion zone. Do not stand or sit on kick boards or handrails.	B	2	L	Supervisor Work crew

Job Task #	Job Step	Potential Health, Safety and Environmental Hazards	PROBABILITY	CONSEQUENCE	RATING	Control Measures	PROBABILITY	CONSEQUENCE	RATING	PERSON(S) RESPONSIBLE
		EWP failure causing injury to worker - Crush / struck by object - Cuts, strains, abrasions, burns	C	3	H	Authority and empowerment to Stop the Job . Ensure positive communication at all times with the operator. Follow all site rules and procedures. Ensure correct manual handling techniques are followed. Wear all mandatory PPE and task specific PPE. Communicate task clearly with all work crew members. Ensure a thorough understanding of expectations. If a hazard is identified in the work area – fix it immediately or if unable to do so, isolate the hazard and inform you supervisor. Work on flat surface where practicable	B	3	M	Work crew Supervisor
5	Completion of task	Slips, trips, and falls	C	4	H	Leave work area tidy. Store equipment in authorised access area (e.g. locked storage facility) Report any damage/defect to supervision and tag out any faulty equipment.	B	4	M	Work crew

SWMS No 015	SJD Electrical Job Safety Analysis / Safe Work Method Statement	Page 7 of 8
Safe Work Method Statement Title: SWMS: 015 SCISSOR LIFT / BOOM LIFT / CHERRY PICKER		

Personnel Qualifications and Experience Required	Personnel Duties and Responsibilities		Training Required to Complete Work
	Supervisor	All Personnel	
Personnel will need to be trained and confident at working at heights.	Empower all personnel to STOP the JOB if required to do so.	All personnel to maintain tidy work area on site at all times. Personal Protective Equipment (PPE) to be worn at all times on site.	Supervisor to be trained in risk identification, assessment and control e.g. Job Safety Analysis (JSA).
Appropriate industry and site specific induction.	Supervisor to carry out daily inspections of work site for hazards.	Ensure housekeeping is maintained throughout the task to avoid the risk of injury.	Training on specific scaffolding type and basics to be conducted for erection and use under 4.0 m high.
Appropriate Certificates of Competency will be required by personnel for particular operations working at height, e.g. scaffolding, lifting equipment (when applicable)	Ensure appropriate permits are in place for the task (if applicable).	Barricading to be used as appropriate to protect others from working below elevated work.	Training in the use of specific plant. Inspection and maintenance of equipment to be conducted (where applicable) for the type of equipment / plant to be used.

Engineering Details / Certificates / Australian Standards	Referenced – Codes of Practice / Regulations / Legislation
<ul style="list-style-type: none"> Floor capacity sufficiently engineered to carry weight of elevated work platform/s AS/NZS 1891 Industrial fall arrest systems and devices AS/NZS 2626 Industrial Safety Belts and Harnesses AS/NZS 3000 Wiring Rules AS/NZS 3012:2010 Electrical Installations – Construction and Demolition Sites. AS/NZS 3017 - Electrical installations - verification guidelines AS/NZS 4836 Safe working on or near low voltage electrical installations and equipment 	<ul style="list-style-type: none"> Work Health and Safety Act and Regulations 2011 Electrical Safety Act 2002 and Regulations 2013 Electrical Safety Code of Practice 2013 - Managing Electrical Risks in the Workplace Hazardous Manual Tasks Code of Practice 2011. Managing risks of Plant in the workplace Code of Practice 2013. <p>(remove any of the above that are not applicable for the task being undertaken)</p>
Plant / Equipment Required (Mobile or Static)	Maintenance Checks / Calibration Intervals
<ul style="list-style-type: none"> Portable hand tools, electrical power tools / drills (insulated tools) May require scissor lift, boom lift or cherry picker (refer to Scissor Lift / Boom Lift / Cherry Picker SWMS) Appropriate testing equipment Hazard Identification to be conducted for plant used e.g. Scissor lift, boom lift, cherry picker, cranes, swing-stages, crane work box. Ensure compatibility of components particularly for fall protection / restraint / arrest equipment. 	<ul style="list-style-type: none"> Cranes, Elevated Work Platform/s in accordance with manufacturers recommendations Fall arrest / protection equipment must be checked prior to every use by a competent, trained person. Hand tools and ladders to be checked daily. All electrical equipment to be tested and tagged.

